Einrichten vom W-Lan beim ARCH Linux Default Image

Quelle Wifi/Wlan Config

- einlogen als root z.b. ssh root@<pikvm-ip-adresse>
- Filesystem ReadWrite einstellen (rw)
- W-lan Service einschalten „systemctl enable netctl-auto@wlan0.service“
- W-LAN per GUI oder CLI konfigurieren
  - wifi-menu -o #GUI
  - wpa_passphrase wifiname this_is_my_great_and_secure_key_1234567890 #CLI WPA-Key
  - nano /etc/netctl/wlan0-wifiname #CLI Konfigurations file

Login & filesystem RW


```
ssh root@pikvm
rw
```


GUI

> **TIPP**
>
> The -o makes sure that the WiFi passphrase is stored encrypted.

```
wifi-menu -o
```

> **Netzwerk wird Gescannt**

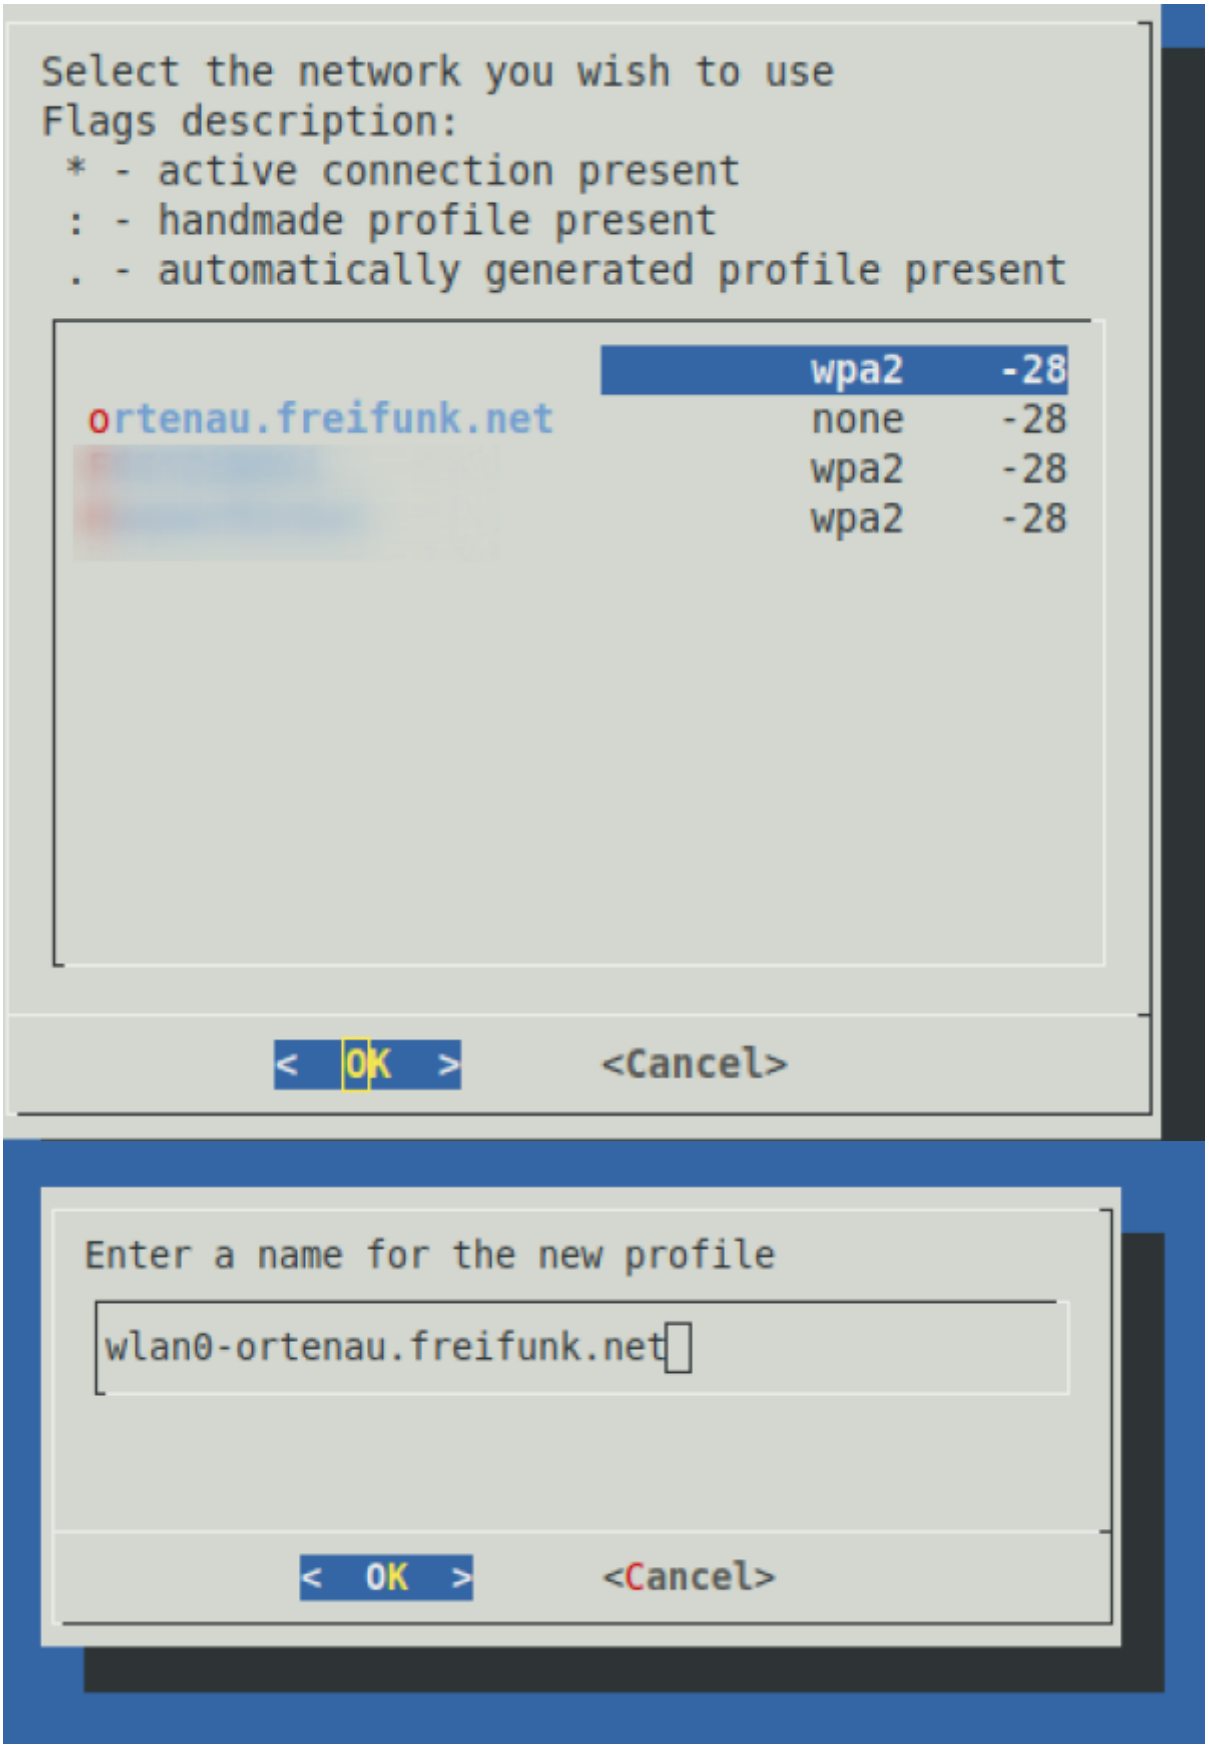
Select the network you wish to use
Flags description:
* - active connection present
: - handmade profile present
. - automatically generated profile present
ortenau.freifunk.net
wpa2 -28
none -28
wpa2 -28
wpa2 -28
< OK >
<Cancel>
Enter a name for the new profile
wlan0-ortenau.freifunk.net
< OK >
<Cancel>

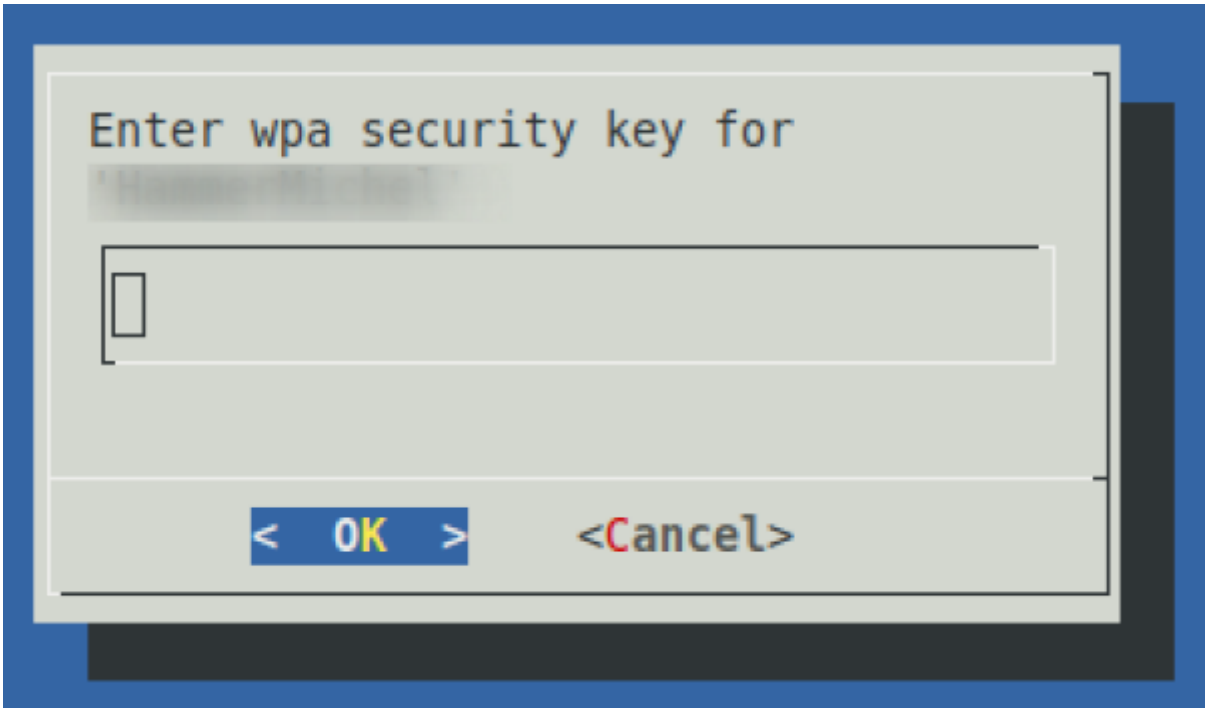

From:
https://quad.logout.de/ - **quad.logout.de**

Permanent link:
https://quad.logout.de/pikvm:wlan?rev=1603272687

Last update: **2020/10/21 09:31**